


4AM

Semi automatic case sealer

The reliable solution to
your carton sealing needs

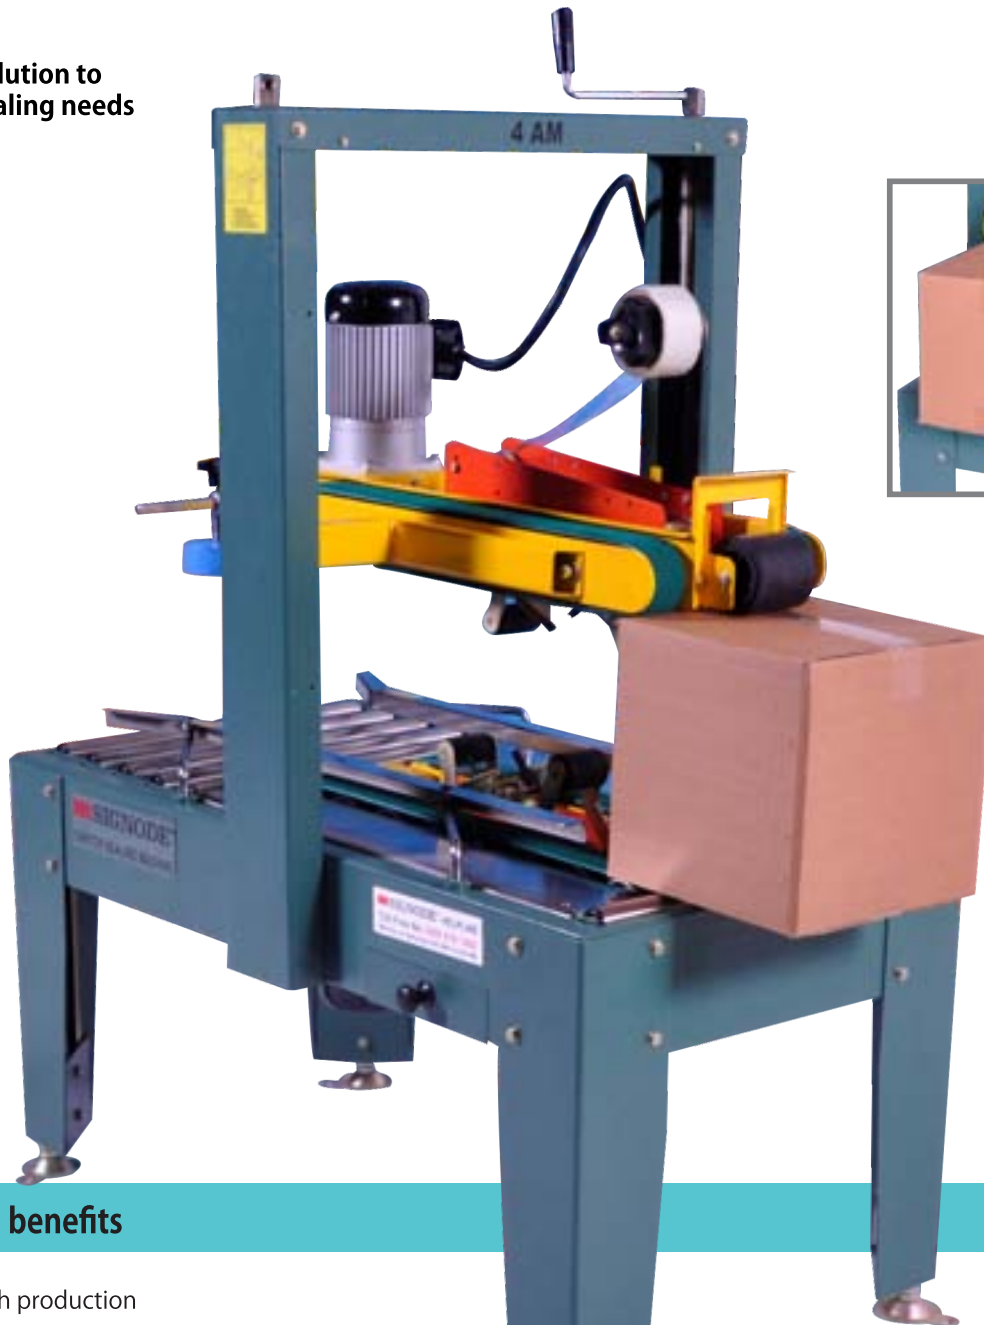

Features and benefits

- Ideal for batch production
- Twin mast column for greater stability during operation
- Separate top and bottom drive for perfect taping
- Uniform and controlled pressure during taping
- Twin flap squeeze rollers provides additional squeezing for perfect top flaps alignment
- Belt speed of 20 m/minute .
- Inbuilt tool box
- Self-centering side guides for accurate centering
- Positive top and bottom drive to ensure sealing of tall and heavy cartons, in addition to regular cartons



Semi automatic case sealer

Technical data

Machine specification	4AM	4AM- ND
Taping Head	Standard (2"/2.5"/3")	Standard (2"/2.5"/3")
Length	1080 mm	1080 mm
Width	570 mm	570 mm
Height	1460 mm	1460 mm
Weight	143 Kg	146 Kg
Color	RAL 6000 & RAL 1021 Yellow (Moving Parts)	RAL 6000 & RAL 1021 Yellow (Moving Parts)
Drive motor	0.25 HP, 2 No.	0.25 HP, 2 No.
Belt speed	20 Metres/ Min	20 Metres/ Min
Machine Throughput	Belt speed/ (Carton length+280 mm)	Belt speed/ (Carton length+280 mm)
Utility requirements		
Air requirement	NA	NA
Air consumption	NA	NA
Power consumption	0.4KW	0.4KW
Tap roll length	65 M / 650 M/ 1000 M	65 M / 650 M/ 1000 M
Case dimensions		
Length	150 mm - Un Limited	150 mm - Un Limited
Width	160 mm -450 mm	130 mm -450 mm
Height	100 mm -550 mm	100 mm -550 mm
Weight	2- 50 Kg	2- 50 Kg
Carton ply	Min 3 Ply	Min 3 Ply



Authorised Distributor


we serve values

Univend Associates Pvt. Ltd.
S10, Delta Centre, M.C. Road, Angamaly, Ernakulam, Kerala - 683 572
Tel : +91 484 - 2456875, 2459575, 2456775
E mail : univend.in@gmail.com Web : www.univend.in